


THERMOPLASTIC BIKE SYMBOL AND ARROW LOCATED AT BEGINNING OF INTERSECTION

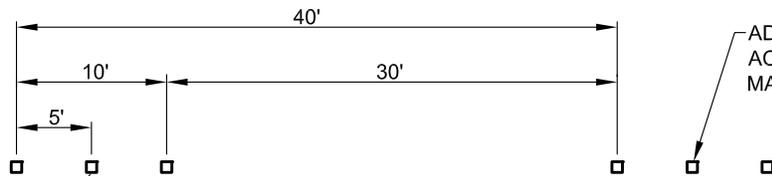

REFLECTIVE TYPE I BUTTON TYP

ADHERE TO STREET SURFACE USING ACCEPTABLE THERMOPLASTIC MATERIAL TYP. SEE NOTE 5.

**BUTTON PATTERN**

**NOTES:**

1. CLEAR SPACE SHALL BE NO GREATER THAN 6 FEET BETWEEN CROSSWALK BARS.
2. ALL DIMENSIONS FOR LANE WIDTH ARE ON CENTER.
3. ALL LONGITUDINAL MARKINGS LOCATED 30 FEET FROM INTERSECTION SHALL CONSIST OF THERMOPLASTIC MATERIAL.
4. ALL PAVEMENT MARKINGS AND LAYOUT SHALL COMPLY WITH CURRENT MUTCD STANDARDS UNLESS SHOWN OTHERWISE.
5. ADHERE BUTTONS TO STREET SURFACE USING 4" x 4" SQUARE THERMOPLASTIC MATERIAL MATCHING THE COLOR OF BUTTON.

**CITY OF CORVALLIS**

ENGINEERING DIVISION

**CROSSWALK AND  
BUTTON PATTERN**

DATE: JANUARY 2020

SCALE: NONE

STANDARD DETAIL No.

APPROVED: *BAJ*

112