


BUS SHELTER PAD ORIENTATION
WIDE PLANTER STRIP

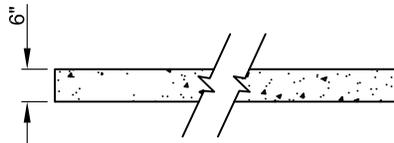


TYPICAL SECTION
FOR ALL CONCRETE ASSOCIATED
WITH BUS PAD AND WALK WAYS

PASSENGER SHELTERS
(APPROXIMATELY 4' x 8')

PANELS SHALL BE TEMPERED SAFETY GLASS CLEAR NO MARK.

ONE 48" BENCH PER SHELTER INSTALLED AGAINST THE BACK OR
AGAINST ONE SIDE.

ONE MAP FRAME PER SHELTER

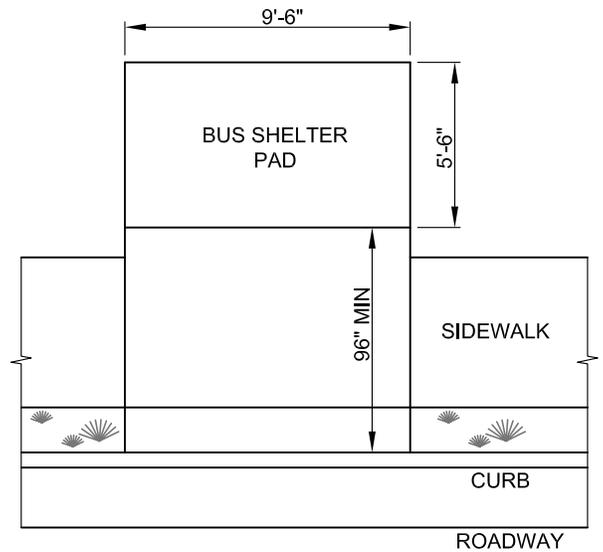

BUS SHELTER PAD ORIENTATION
NARROW PLANTER STRIP

NOTES:

1. CONCRETE BUS PAD SHALL BE AS PER CORVALLIS STANDARD CONSTRUCTION SPECIFICATIONS FOR 6" THICK SIDEWALK CONSTRUCTION.
2. ALL CONCRETE PATH WAY THAT IS CONSTRUCTED FOR PASSENGER ACCESS SHALL BE AS PER CORVALLIS STANDARD CONSTRUCTION SPECIFICATIONS FOR 6" THICK SIDEWALK CONSTRUCTION.
3. CONCRETE PADS MUST BE LEVEL WITH ADJACENT HARD SURFACE AND MEET ADA STANDARDS FOR SLOPE.

CITY OF CORVALLIS

ENGINEERING DIVISION

**BUS SHELTER
PAD ORIENTATION**

DATE: JANUARY 2020

SCALE: NONE

STANDARD DETAIL No.

APPROVED: *[Signature]*

501