




**TYPE III BARRICADE**

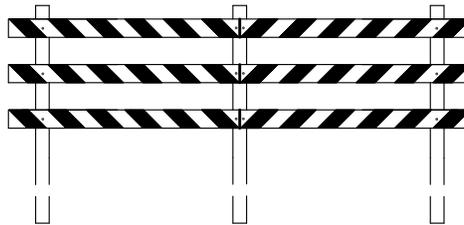

**TYPE III BARRICADE**  
FULL ROADWAY CLOSURE  
NO DIRECTION LEFT OR RIGHT



**TYPE III BARRICADE**  
STRIPING DIRECTING TRAFFIC TO THE LEFT



**TYPE III BARRICADE**  
STRIPING DIRECTING TRAFFIC TO THE RIGHT

**NOTES:**

1. STRIPING ON BARRICADE RAILS SHALL BE A ALTERNATING RED AND WHITE REFLECTIVE STRIPE SLOPING DOWNWARD AT AN ANGLE OF 45° IN THE DIRECTION ROAD USERS ARE TO PASS.
2. THE MINIMUM LENGTH FOR A TYPE III BARRICADE SHALL BE 48"
3. PERMANENT TYPE III BARRICADE DIMENSIONS AND ORIENTATION SHALL COMPLY WITH THE CURRENT EDITION OF THE MUTCD.
4. WHERE BARRICADE EXTENDS ENTIRELY ACROSS ROADWAY AND NO DETOUR IS PROVIDED THE BARRICADE STRIPING SHALL SLOPE DOWNWARD AT A 45° ANGLE FROM TOP TO THE CENTER.
5. WHEN FULL CLOSURE OF ROADWAY IS INTENDED, BARRICADE MUST EXTEND FULLY ACROSS ROADWAY SURFACE CURB FACE TO CURB FACE.
6. ALL LUMBER DIMENSIONS ARE NOMINAL DIMENSIONS.

**CITY OF CORVALLIS**

ENGINEERING DIVISION

**PERMANENT TYPE III  
BARRICADE**

DATE: JANUARY 2020

SCALE: NONE

STANDARD DETAIL No.

APPROVED: *[Signature]*

**502**