



SINGLE INVERTED "U"

2' MIN CLEAR HARD SURFACE AREA WHEN ADJACENT TO CURBS OR WALLS

1 1/2" TO 2 1/4" SCHEDULE 40 STEEL PIPE

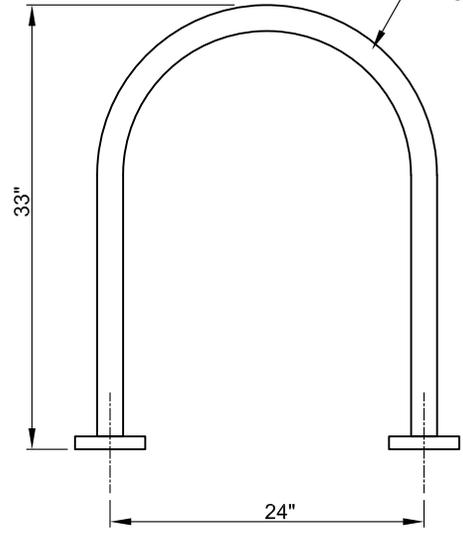

INVERTED "U"

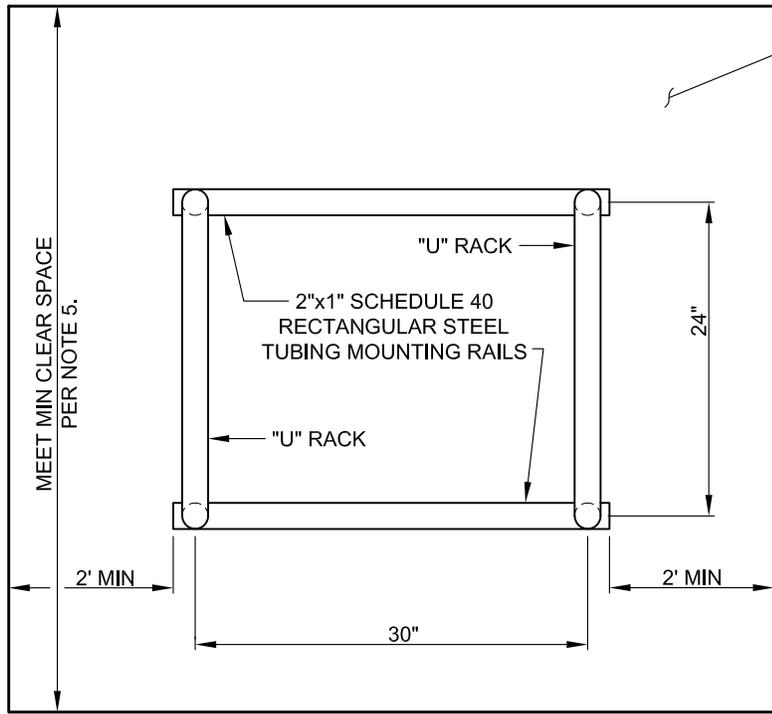

MULTIPLE INVERTED "U"

2' MIN CLEAR HARD SURFACE AREA WHEN ADJACENT TO CURBS OR WALLS

NOTES:

1. BIKE RACKS SHALL HAVE A GLOSS BLACK POLYESTER POWDER COAT FINISH.
2. MOUNTING RAILS SHALL BE FURNISHED WITH MOUNTING HOLES AND VANDAL RESISTANT CONCRETE ANCHOR MOUNTING HARDWARE.
3. EACH "U" SHALL BE WELDED OR MOUNTED TO RAILS OR PLATES WITH VANDAL RESISTANT OR HIDDEN FASTENERS.
4. FOR SINGLE "U" INSTALLATION EACH MOUNTING PLATE WILL BE EQUIPED WITH TOW ANCHOR BOLT HOLES EACH.
5. RACKS MUST MAINTAIN 2' MIN CLEAR SPACE FROM ANY STRUCTURE OR GRADE BREAK.

CITY OF CORVALLIS		
ENGINEERING DIVISION		
INVERTED "U"		
BIKE RACK		
DATE: JANUARY 2020	SCALE: NONE	STANDARD DETAIL No.
APPROVED: <i>BAJ</i>		503