


ROADWAY MONUMENT

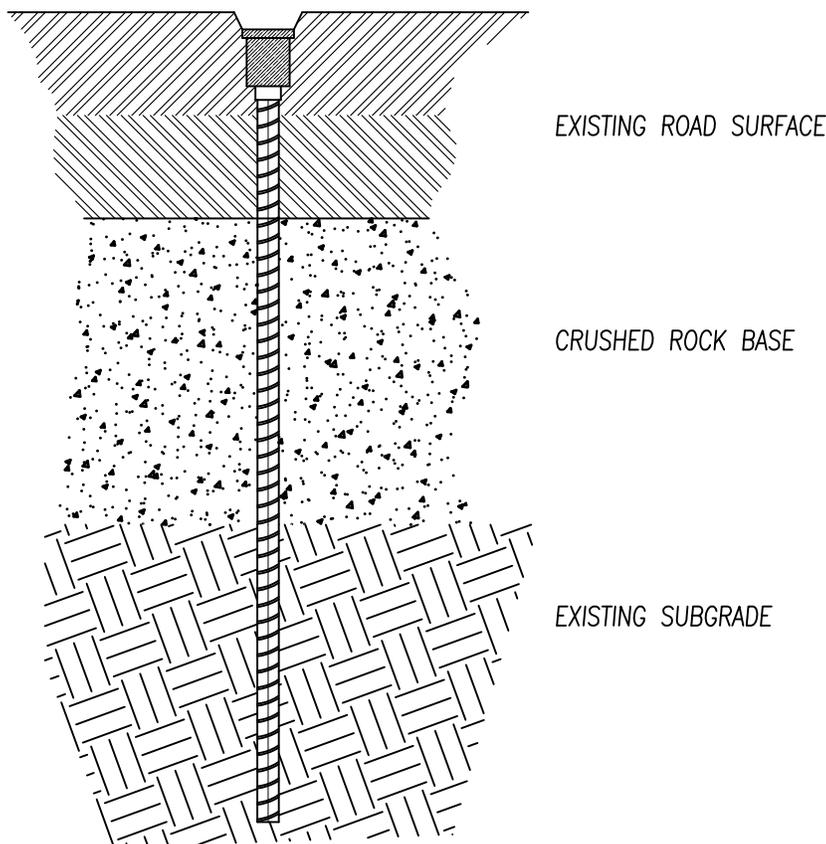

TYPICAL (N.T.S.)

GENERAL NOTES:

- 1: IRON ROD SHALL BE A MINIMUM OF 5/8" X 30" WITH AN ALUMINUM CAP WITH PLASTIC INSERT, SET 1/4" BELOW FINISH GRADE, OR FLUSH WITH SURFACE.
- 2: ALL MONUMENTS SHALL BE SET AFTER SUBSTANTIAL COMPLETION OF CONSTRUCTION, AND WHEN ALL SIGNIFICANT IMPROVEMENTS ARE IN PLACE, PER O.R.S. 209.150.
- 3: ALL SURVEY MONUMENTS DESTROYED AND REPLACED SHALL HAVE A SURVEY FILED WITH THE COUNTY SURVEYORS OFFICE PER O.R.S. CHAPTER 209 REQUIREMENTS.
4. ALL GOVERNMENT CORNERS SHALL BE REFERENCED AND REPLACED PER O.R.S. 209 REQUIREMENTS, AND IN CONFORMANCE WITH BENTON COUNTY STANDARDS..
5. A RECORD OF SURVEY SHALL BE FILED WITH BENTON COUNTY SURVEYORS OFFICE PER O.R.S. 209 STANDARDS FOR ALL MONUMENTS REPLACED, OR RE-ESTABLISHED.

MAINTENANCE OPTION:

- 1: ANY ROADWAY CENTERLINE MONUMENT THAT IS TO BE IMPACTED BY CONSTRUCTION, MAY BE PERPETUATED BY PLACING A CITY OF CORVALLIS APPROVED MONUMENT BOX OVER THE EXISTING MONUMENT AFTER FINAL PAVING LIFT IS BEING COMPLETED.
- 2: TO PERPETUATE A MONUMENT, IT MUST BE REFERENCED PRIOR TO CONSTRUCTION BY AN OREGON LICENSED PROFESSIONAL LAND SURVEYOR. PER O.R.S. 209.140-150-155.
- 3: CLEAR CONCISE FIELD NOTES AND SKETCHES, AND/OR, ELECTRONIC FIELD BOOK DATA SHALL BE PROVIDED TO THE CITY SURVEYOR WITH A MINIMUM OF THE PROJECTS SURVEY CONTROL POINTS, AND 4 REFERENCE POINTS, ALONG WITH THE COORDINATES THAT WERE USED TO ESTABLISH THE LOCATION OF THE MONUMENTS TO BE REPLACED. THE DATA IS TO CONFIRM THAT THE MONUMENT HAS NOT BEEN SUBSTANTIALLY DISTURBED DURING CONSTRUCTION.

MONUMENT OPTIONS:

ALUMINUM CAP SHALL BE
 BERNSTEN MODEL FTD 5150
 SURV-KAPS MODEL SK 200
 MARK-IT MODEL RB-5-1-1/2-PI
 OR APPROVED EQUAL

ROD SHALL BE 5/8"X30" IRON ROD
 PER O.R.S. (NO.5 REBAR)

MONUMENT RING AND LID OPTION:

OLYMPIC FOUNDARY INC. PART NO. M1001
 OR APPROVED EQUAL.

CITY OF CORVALLIS

ENGINEERING DIVISION

ROADWAY MONUMENT

DATE: JANUARY 2020

SCALE: NONE

STANDARD DETAIL No.

APPROVED:

EBB

511