


# ROADWAY MONUMENT RING/ BOX INSTALLATION OVER EXISTING VALVE BOX

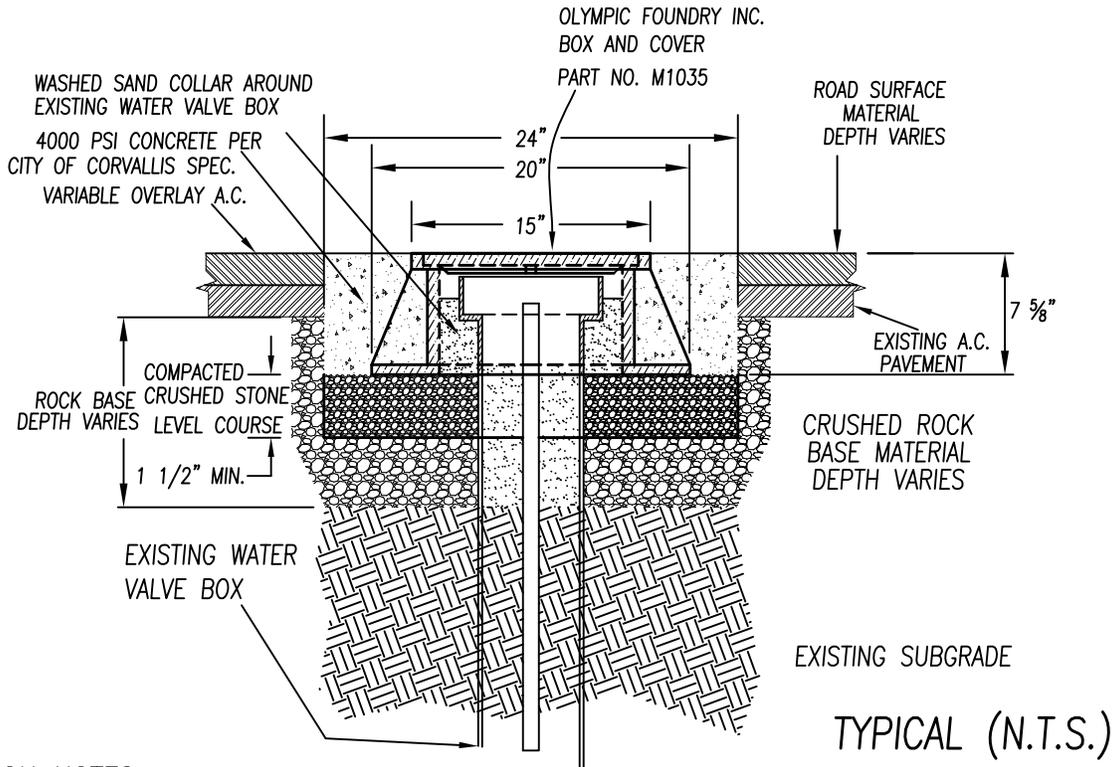

TYPICAL (N.T.S.)

### INSTALLATION NOTES:


SEE GENERAL NOTES:

1. STREET SAWCUT LINES SHALL BE MARKED BY A OREGON LICENSED PROFESSIONAL LAND SURVEYOR
2. SAW CUTTING AND SPOILS REMOVAL SHALL BE COORDINATED WITH AND PROVIDED BY THE CONTRACTOR.
3. AFTER MONUMENT IS CHECKED FOR CORRECT POSITION THE CONTRACTOR SHALL INSTALL THE MONUMENT BOX AND CONCRETE ENCASEMENT TO FINISH GRADE.
5. AFTER MONUMENT BOX AND CONCRETE ENCASEMENT ARE INSTALLED, THE SURVEYOR SHALL SET, AND CHECK THE POSITION OF THE MONUMENT FOR CORRECT LOCATION.

### GENERAL NOTES:

1. OREGON LICENSED PROFESSIONAL LAND SURVEYOR SHALL LOCATE AND REFERENCE MONUMENTS PRIOR TO INSTALLATION.
2. CRUSHED AGGREGATE BASE SHALL BE COMPACTED TO CITY OF CORVALLIS STREET STANDARDS.
3. CONCRETE COLLAR SHALL BE DIAMOND SHAPED (ORIENTATION PER ENGINEER) WITH A MINIMUM OF 4" OF CLEARANCE FROM THE PERIMETER OF THE BASE. CONCRETE COLLAR SHALL BE INSTALLED THE FULL THICKNESS OF THE MONUMENT BOX.
4. ALL MATERIALS AND FINISHES SHALL MEET CITY OF CORVALLIS STANDARD SPECIFICATIONS, OR APPROVED EQUAL

2 FOOT SQUARE  
MINIMUM SIDE LENGTH

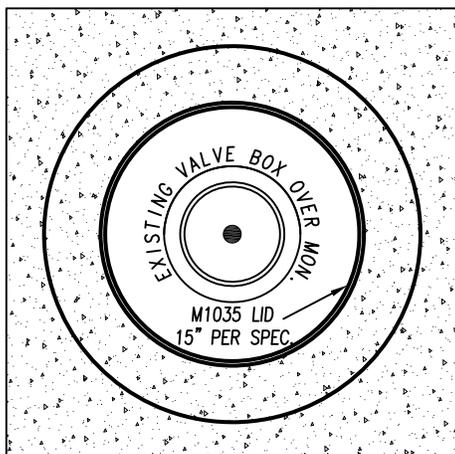

**MONUMENT RING AND LID:**  
OLYMPIC FOUNDRY INC. PART NO. M1035  
OR APPROVED EQUAL.

CITY OF CORVALLIS  
ENGINEERING DIVISION

**ROADWAY MONUMENT  
RING/BOX INSTALLATION  
OVER EXISTING VALVE BOX**

DATE: JANUARY 2020	SCALE: NONE	STANDARD DETAIL No.
APPROVED: <i>EB</i>		<b>512</b>