


BUTTERFLY VALVE

GATE VALVE

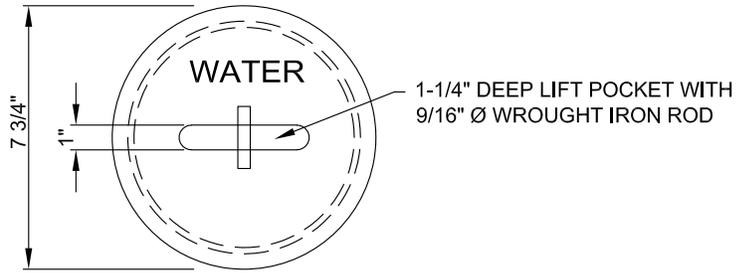

**VALVE BOX COVER
DETAIL**

NOTES:

1. VALVE BOX COVER SHALL BE CAST IRON "PICK HOLE" TYPE AND HAVE THE WORD "WATER" CAST INTO IT. USE OLYMPIC FOUNDRY VB 910 OR APPROVED EQUAL.
2. IN NON-PAVED AREAS, PROVIDE A 24" x 24" x 4" THICK PORTLAND CEMENT CONCRETE PAD CENTERED ON THE VALVE BOX. MINIMUM OF 6" THICK COMPACTED AGGREGATE UNDER CONCRETE PAD. WHEN DIRECTED BY THE ENGINEER, A BLUE FIBERGLASS MARKER POST SHALL BE PLACED ADJACENT TO THE CONCRETE PAD.
3. IN NON-PAVED AREAS, INSTALL BLUE FIBERGLASS MARKER POST AT EDGE OF CONCRETE PAD THAT SURROUNDS VALVE BOX.
4. ALL VALVES SHALL BE SUPPORTED WITH A PRECAST CONCRETE PAD.

CITY OF CORVALLIS		
ENGINEERING DIVISION		
VALVE BOX SETTING		
DATE: JANUARY 2020	SCALE: NONE	STANDARD DETAIL No.
APPROVED: <i>EBB</i>		302