


ROADWAY MONUMENT RING / BOX INSTALLATION

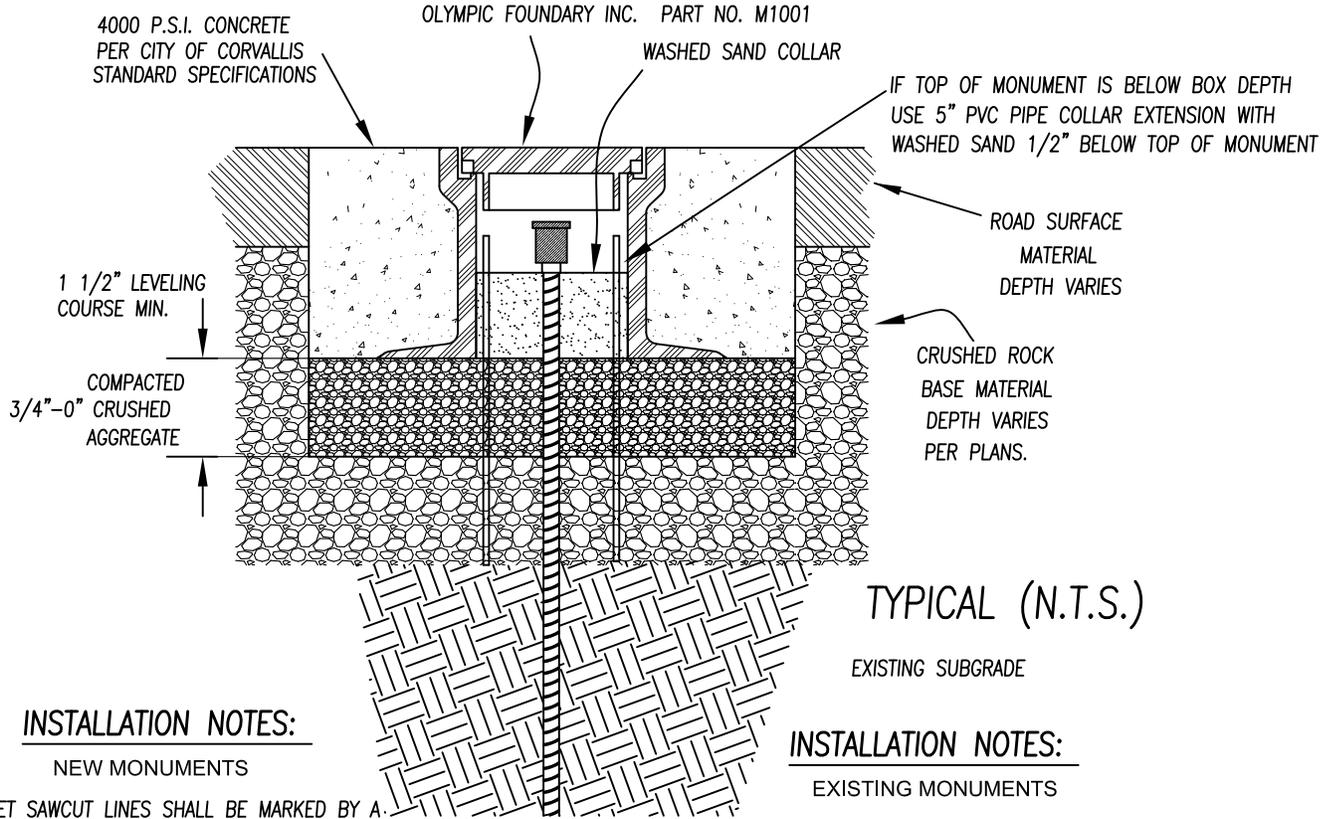

INSTALLATION NOTES:

NEW MONUMENTS

1. STREET SAWCUT LINES SHALL BE MARKED BY AN OREGON LICENSED PROFESSIONAL LAND SURVEYOR
2. SAWCUTTING, AND SPOILS REMOVAL TO BE COORDINATED WITH AND PROVIDED BY THE CONTRACTOR.
3. MONUMENT SETTING AND SPOILS REMOVAL SHALL BE COORDINATED BY THE SURVEYOR WITH THE CONTRACTOR
4. AFTER MONUMENT IS INSTALLED IN THE CORRECT POSITION THE CONTRACTOR SHALL INSTALL THE RING, COVER, AND CONCRETE ENCASEMENT TO FINISH GRADE.
5. AFTER MONUMENT BOX AND CONCRETE ENCASEMENT ARE INSTALLED, THE SURVEYOR SHALL SET, AND CHECK THE POSITION OF THE MONUMENT FOR CORRECT LOCATION PRIOR TO FILING THE RECORD OF SURVEY PER O.R.S. 209.250.

INSTALLATION NOTES:

EXISTING MONUMENTS

- 1: TO PRESERVE AND PROTECT A MONUMENT, IT MUST BE REFERENCED PRIOR TO CONSTRUCTION BY AN OREGON LICENSED PROFESSIONAL LAND SURVEYOR. RING AND COVER INSTALLATION SAME AS FOR NEW MONUMENTS. MONUMENT POSITION TO BE VERIFIED, AFTER RING INSTALLATION.

GENERAL NOTES:


1. CRUSHED AGGREGATE BASE SHALL BE COMPACTED TO CITY OF CORVALLIS STREET STANDARDS FOR THE 1 1/2" MINIMUM DEPTH.
2. CONCRETE COLLAR SHALL BE DIAMOND SHAPED (ORIENTATION PER ENGINEER) WITH A MINIMUM OF 4" OF CLEARANCE FROM THE PERIMETER OF THE BASE. CONCRETE COLLAR SHALL BE INSTALLED THE FULL THICKNESS OF THE MONUMENT BOX.

MATERIALS:

ALL MATERIALS CITY OF CORVALLIS STANDARD SPECIFICATIONS, OR APPROVED EQUAL.

MONUMENT RING AND LID:

OLYMPIC FOUNDARY INC. PART NO. M1001 OR, APPROVED EQUAL.

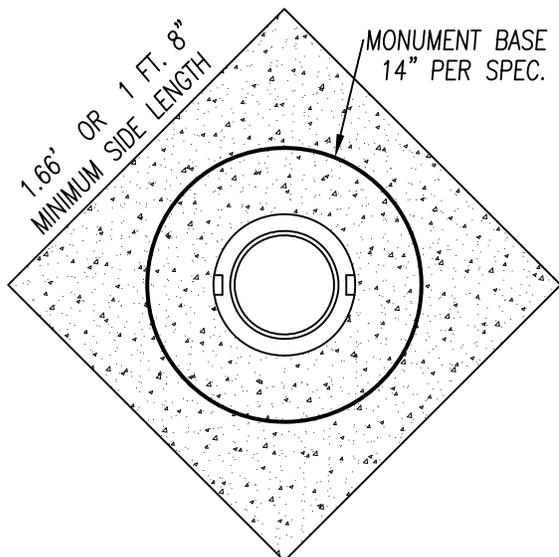

CITY OF CORVALLIS

ENGINEERING DIVISION

ROADWAY MONUMENT RING/BOX INSTALLATION

DATE: JANUARY 2020

SCALE: NONE

STANDARD DETAIL No.

APPROVED: *EBB*

510